


SONALIKA

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

50 RX

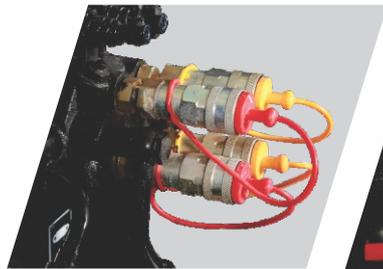

AGILE HIGH BACKUP
TORQUE ENGINE

8F+2R
TRANSMISSION®

HEAVY LIFT
CAPACITY

EASY FRONT AND
LOADER ATTACHMENT

HEAVY DUTY
2WD/4WD



COST
EFFICIENT
MECHANICAL TRACTORS

MADE OF
REAL
STEEL

STRATEGIC
COLLABORATION
WITH
YANMAR

SONALIKA

**THE TOUGHEST
PERFORMER
FOR YOUR FIELD**

50 RX



FEATURES

Model Description	SONALIKA-50
ENGINE	
Engine Type	Three Cylinder Natural Aspirated Engine
HP Category	50
No. of Cylinders	3
Aspiration	Natural
Cubic Capacity (cc)	2893
Rated RPM	2100
Air cleaner	Dry Air Cleaner with Clogging sensor
Cold Start	Yes
Max Torque (Nm)	190@1200 RPM
Exhaust	Underhood Downdraft silencer Underhood Upward
TRANSMISSION	
Drive	2WD/4WD
Clutch	Dual Clutch
Gearbox	8F+2R
Front Axle	2WD/4WD
Transmission	Swift Shift
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	29.94@2100
Minimum Speed (Km/Hr)	2.27@2100
BRAKES	
Brakes	Oil Immersed Brake
Type of actuation	Mechanical
Parking Brake	Independent Type
DIFFERENTIAL LOCK	
Differential lock	Yes, Foot Operated
PTO	
PTO (rpm)	540
PTO (actuation)	Mechanical
STEERING	
Steering	Power
ELECTRICAL	
Battery	12V, 88 Ah
Alternator	12V, 10 Amp
Seven pin trailer socket	Yes
HYDRAULICS	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	1600 kg
Auxiliary hydraulic circuit	2DA
Lift rods	Yes

SAFETY SWITCH

Clutch Safety Switch	Yes
PTO Safety Switch	Yes
Neutral Safety Switch	Yes

CAPACITY (LTRS)(+/-5%)

Fuel tank (Lit)	65
-----------------	----

TURNING RADIUS

Without Brakes (m)	3.7
--------------------	-----

TYRE

Front	9.5-20
Rear	13.6-28

DIMENSION & WEIGHT(+/-5%)

Weight(kg)	2780
Wheel Base (mm)	2175
Total Length (mm)	3936
Total Width (mm)	1785
Height (mm) Up to ROPS	2488
Min Ground Clearance (mm)	293
Front Track (mm)	1535
Rear Track (mm)	1420

OTHERS

Fuel Indicator gauge	Yes
Front Toe Hook	Yes, inbuilt in front weight
Front & rear weights with std. Ballast	Base Weight 72Kg+Front 6X31 Kg and Rear 1X34 Kg on each wheel.
Trailer Hitch	Swinging Drawbar
ROPS	Yes

OPTIONAL FEATURES

Tyres (Radial Tyre)	Front 250/85R20, Rear 340/85R28
Cabin	Add on-Heater/HVAC
Front Mudguard	Yes

*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE. Please correlate with latest updates, accessories shown may not be part of standres product.

DEALER STAMP



INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221

Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.sonalika.com/www.solisworld.com